



SPECS

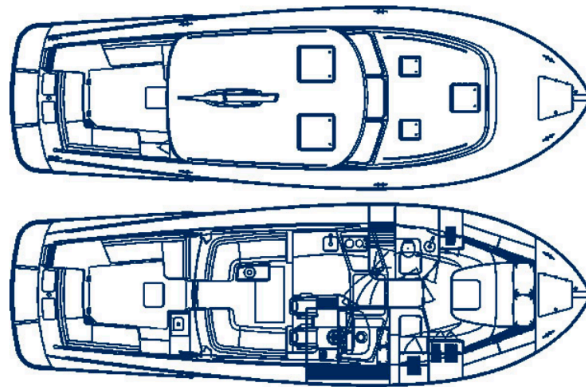

*\* Performance is estimated and will vary according to equipment selected, load and sea condition.*

|                |                                                                                      |
|----------------|--------------------------------------------------------------------------------------|
| LOA            | 43' 9"                                                                               |
| BEAM           | 14' 6"                                                                               |
| DRAFT          | 2' 4"                                                                                |
| DISPLACEMENT   | 28,000 lbs.                                                                          |
| FUEL CAPACITY  | 500 U.S. gallons                                                                     |
| WATER CAPACITY | 100 U.S. gallons                                                                     |
| ENGINE         | Twin Cummins QSB 6.7 liter 550hp diesel engines with Common Rail technology          |
| JETS           | Twin Hamilton 322 Jet drives                                                         |
| OPTION         | Volvo IPS 600 pod drives                                                             |
| CONSTRUCTION   | DualGuard™ SCRIMP® Carbon E-glass composite hull with vinylester resin. E-glass deck |
| CRUISING SPEED | 29 knots (est.)*                                                                     |
| TOP SPEED      | 34 knots (est.)*                                                                     |

## SPECS

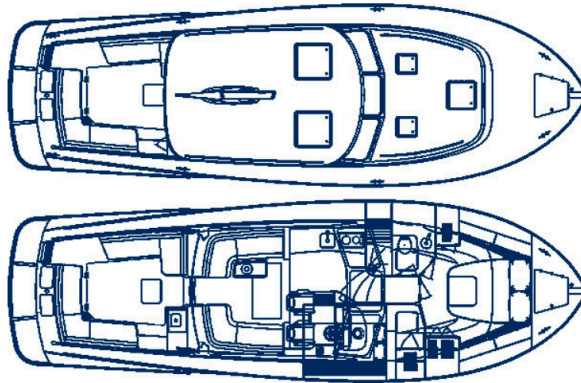


*\* Performance is estimated and will vary according to equipment selected, load and sea condition.*

|                |                                                                                                                          |
|----------------|--------------------------------------------------------------------------------------------------------------------------|
| LOA            | 43' 9"                                                                                                                   |
| BEAM           | 14' 6"                                                                                                                   |
| DRAFT          | 2' 4"                                                                                                                    |
| DISPLACEMENT   | 29,000 lbs.                                                                                                              |
| FUEL CAPACITY  | 500 U.S. gallons                                                                                                         |
| WATER CAPACITY | 100 U.S. gallons                                                                                                         |
| ENGINE         | Twin Caterpillar C8.7 650 HP common rail diesels with transmission PTO pumps for variable control hydraulic bow thruster |
| JETS           | Twin Hamilton 322 Jet drives                                                                                             |
| OPTION         | Volvo IPS 600 pod drives                                                                                                 |
| CONSTRUCTION   | DualGuard™ SCRIMP® Carbon E-glass composite hull with vinylester resin. E-glass deck                                     |
| CRUISING SPEED | 29 knots (est.)*                                                                                                         |
| TOP SPEED      | 34 knots (est.)*                                                                                                         |

## CONNECT



SPECS

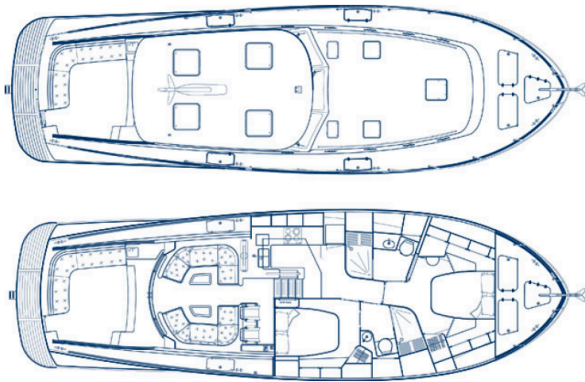



*\*All performance data is estimated and not guaranteed.*

|                  |                                                                                      |
|------------------|--------------------------------------------------------------------------------------|
| LOA              | 55' 3"                                                                               |
| LWL              | 51' 0"                                                                               |
| BEAM             | 17' 9"                                                                               |
| DRAFT            | 2' 11"                                                                               |
| DISPLACEMENT     | 55,000 lbs.                                                                          |
| FUEL CAPACITY    | 1,200 U.S. gallons                                                                   |
| WATER CAPACITY   | 200 U.S. gallons                                                                     |
| ENGINE           | Twin Caterpillar C-18 1000 HP diesels                                                |
| JETS             | Twin Hamilton 403                                                                    |
| CONSTRUCTION     | DualGuard™ SCRIMP® Carbon E-glass composite hull with vinylester resin. E-glass deck |
| CRUISING SPEED   | 27 knots*                                                                            |
| TOP SPEED        | 36 knots*                                                                            |
| TRANSOM DEADRISE | 16°                                                                                  |

CONNECT



SPECS

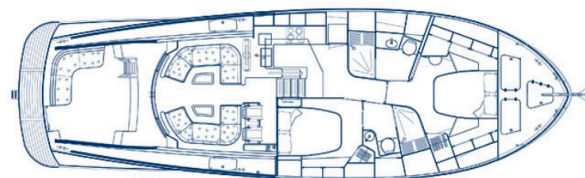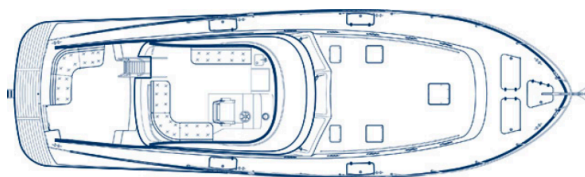

*\*All performance data is estimated and not guaranteed.*

|                  |                                                                                      |
|------------------|--------------------------------------------------------------------------------------|
| LOA              | 55' 3"                                                                               |
| LWL              | 51' 0"                                                                               |
| BEAM             | 17' 9"                                                                               |
| DRAFT            | 2' 11"                                                                               |
| DISPLACEMENT     | 58,000 lbs.                                                                          |
| FUEL CAPACITY    | 1,200 U.S. gallons                                                                   |
| WATER CAPACITY   | 200 U.S. gallons                                                                     |
| ENGINE           | Twin Caterpillar C-18 1000 HP diesels                                                |
| JETS             | Twin Hamilton 403 Waterjets                                                          |
| CONSTRUCTION     | DualGuard™ SCRIMP® Carbon E-glass composite hull with vinylester resin. E-glass deck |
| CRUISING SPEED   | 24 knots*                                                                            |
| TOP SPEED        | 31 knots*                                                                            |
| TRANSOM DEADRISE | 16°                                                                                  |

## CONNECT

